



UNI-DS v8

DEVELOPMENT BOARD

It's time to rethink the way you approach rapid prototyping


Let us introduce you to the latest generation of MIKROE development boards – UNI-DS v8 development board.

MIKROE
Time-saving embedded tools

Table of contents

Introduction	4
Development board overview	6
Power supply unit	8
CODEGRIP – programmer/debugger module	10
Connectivity	12
Communication	22
What's Next?	24


All images shown in the manual are for illustration purpose only.

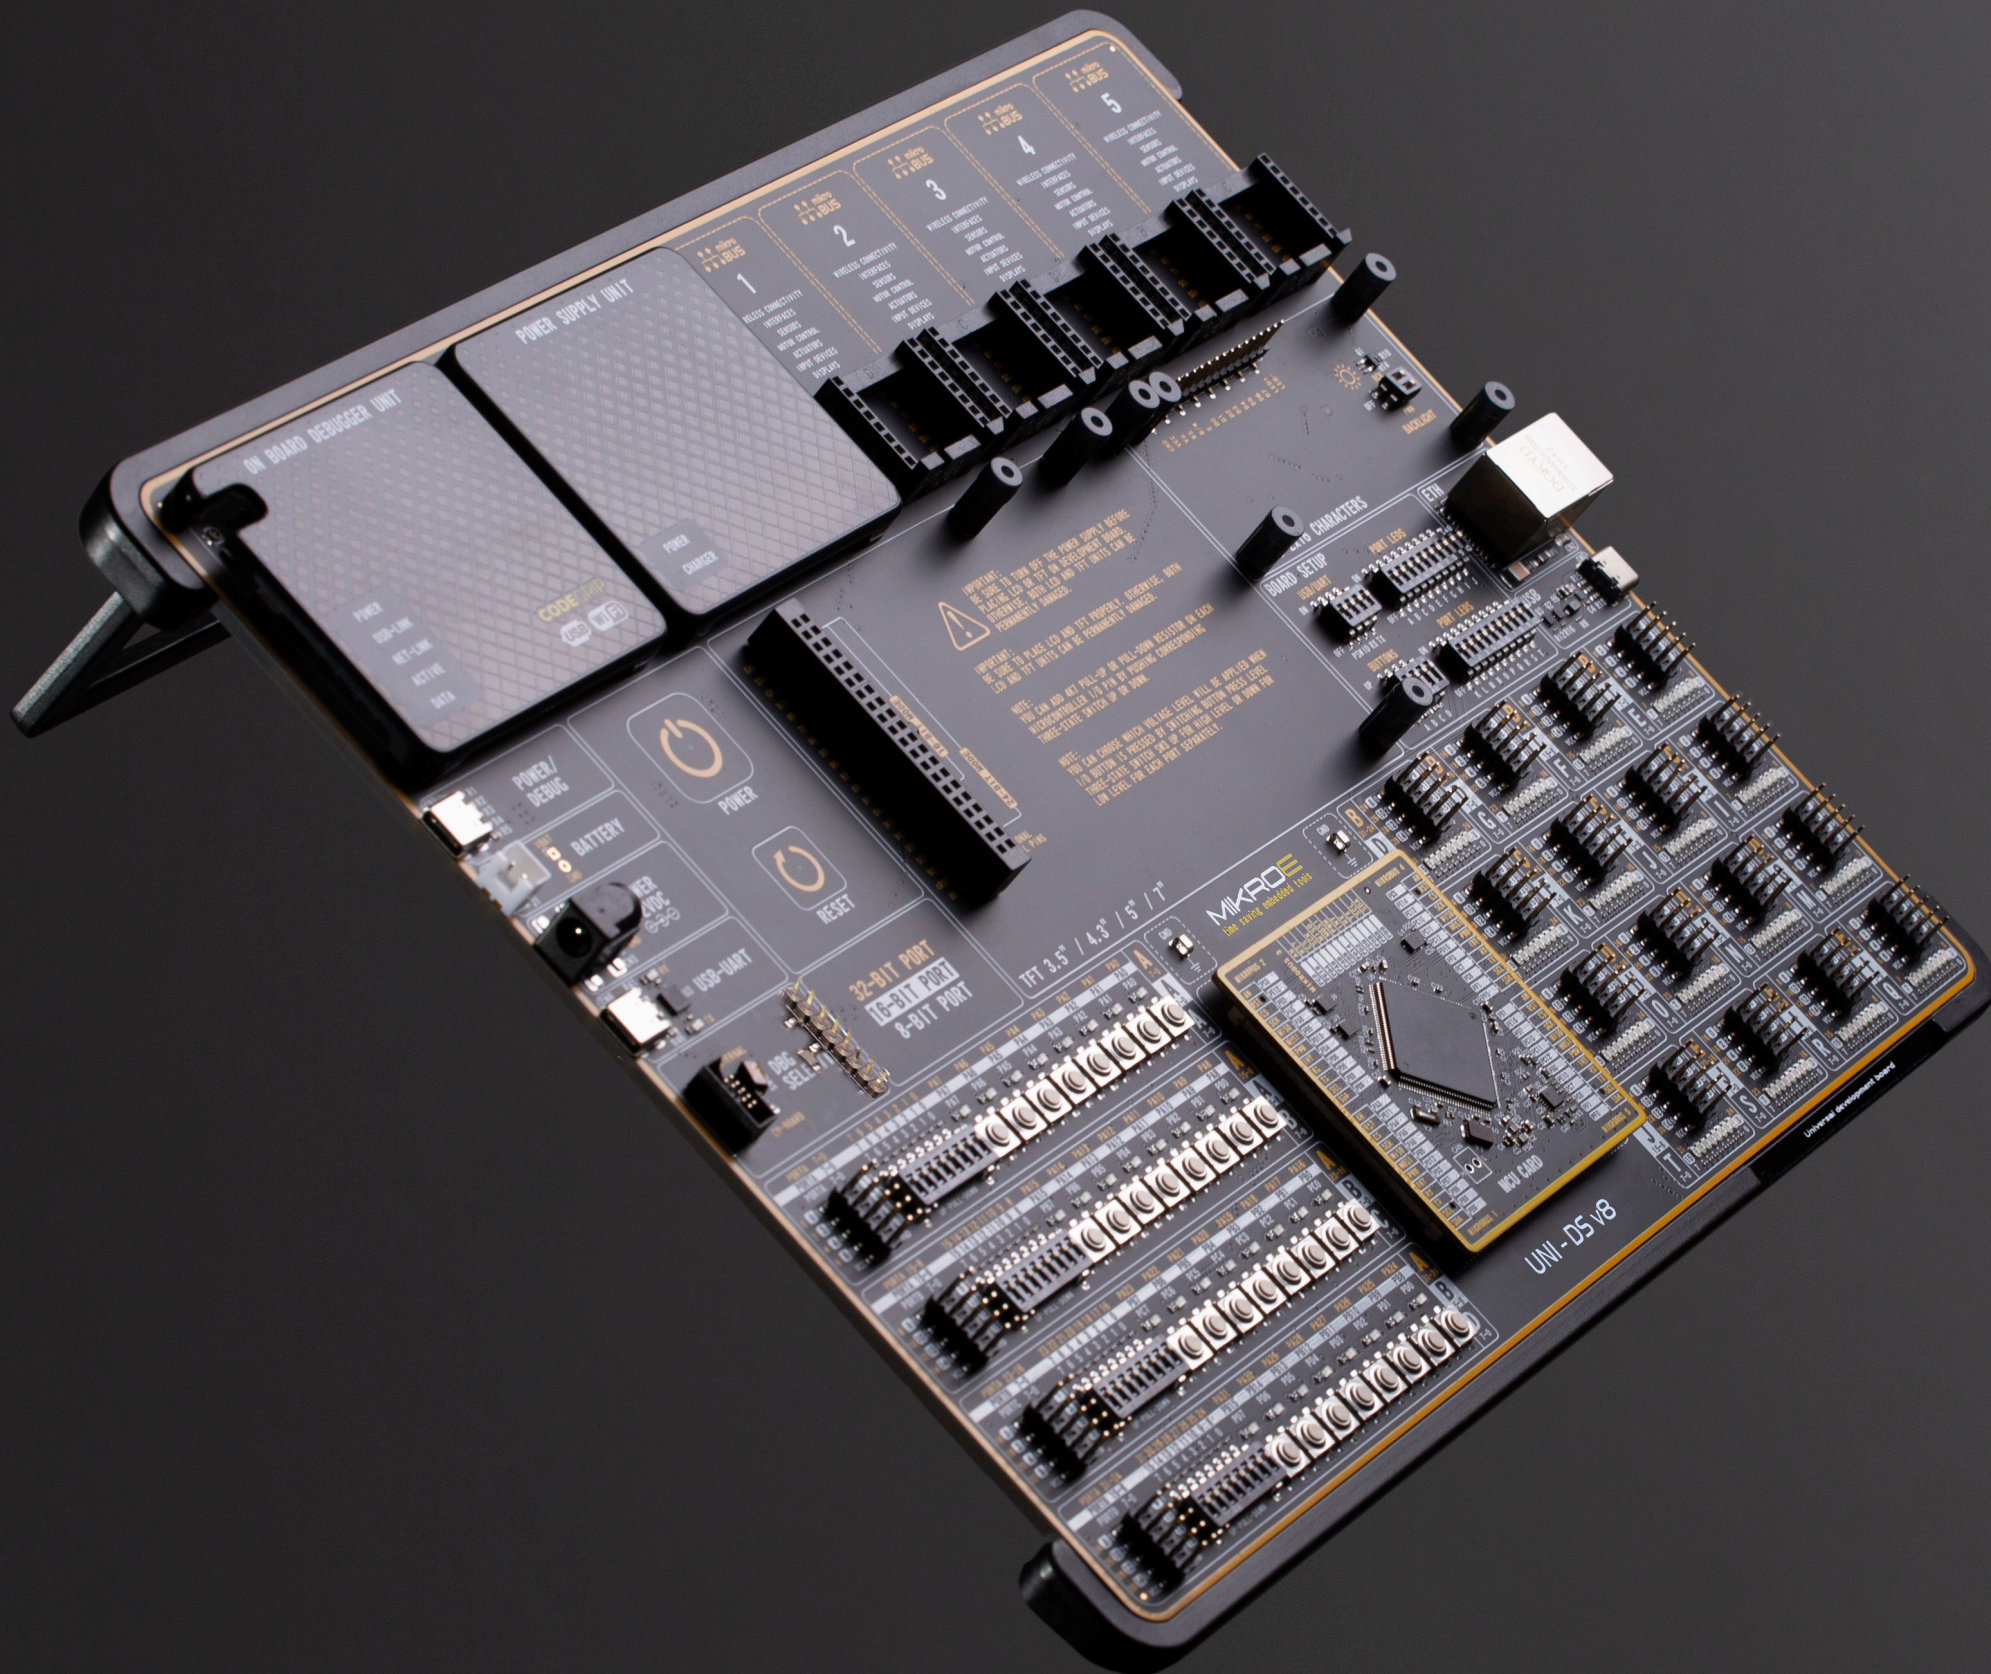

UNI-DS v8 is a development board designed for rapid development of embedded applications. Redesigned from the ground up, it offers broad **set of standard**, as well as several **unique features** never seen before in the world of embedded electronics: **programming and debugging over WiFi network**, support for a large number of microcontrollers from different vendors regardless of their pin number and more.

The development board is designed so that the developer has everything that might be needed, following the Swiss Army knife concept: a highly **advanced programmer/debugger module**, a powerful and clean **power supply module**, a huge set of connectivity options including **USB, Ethernet, CAN (on the SiBRAIN Card, if supported), UART**, as well as set of MIKROE proprietary standards and technologies, including the well-established **mikroBUS™ standard, a standardized SiBRAIN socket, and a standardized 2x20 display connector**. A number of interactive options is also available, including buttons, LEDs, switches, and more... All these features are packed on a single development board, which itself uses innovative manufacturing technologies, delivering fluid and immersive working experience.

UNI-DS v8 development board is also an integral part of the MIKROE rapid development ecosystem. Natively **supported by the MIKROE Software toolchain**, backed up by **hundreds of different Click board™ designs** with their number growing on a daily basis, it covers many different prototyping and development aspects, thus **saving precious development time**.

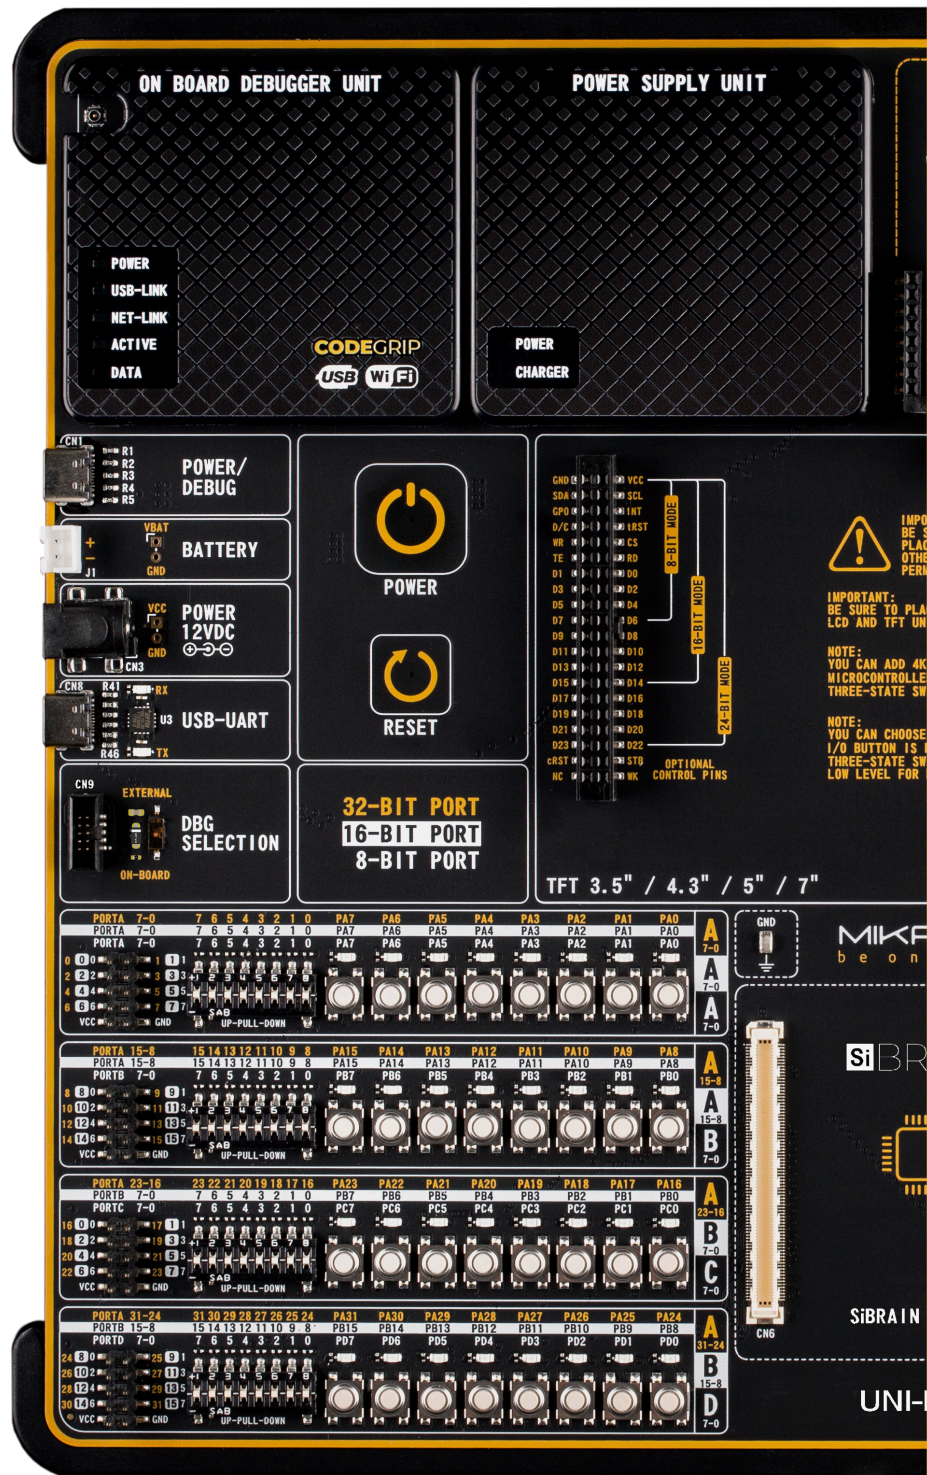

Development board overview

UNI-DS v8 development board features a clean and intuitive layout, allowing the user to instantly understand how to set it up and how to easily tune it according to needs. The development board is divided into several sections, arranged so that all the related interactive components such as switches, buttons, indicators, and connectors, are logically positioned and grouped together.

Each section of the development board contains components important for a reliable operation of the board itself. The Power Supply Unit (PSU), the CODEGRIP programmer/debugger module, and five mikroBUS™ sockets are located at the upper section of the development board. This is where the microcontroller unit (MCU) is powered from, programmed, and interfaced with various Click boards™.

The **PSU module** provides a clean, regulated voltage for the development board. It can use a wide range of external power sources, including a battery, an external 12V power supply, and a power source over the USB Type-C (USB-C) connector. It supports the power OR-ing function for uninterrupted operation. The onboard PSU module regulates, filters, and distributes the power across all the connected peripherals. The development board is equipped with two touch-sensitive buttons labeled as POWER and RESET. These buttons are used to power up the board and reset the MCU. Their sleek design and flawless responsiveness add up to the whole experience. These touch-sensitive buttons are resistant to wear over time and do not exhibit any bouncing effect, unlike mechanical switches.

The powerful **CODEGRIP module**, an universal programmer/debugger, supports a wide range of different MCUs, produced by several major chip vendors. It allows in-place programming and debugging of all supported microcontrollers, offering many useful programming/debugging options, seamless integration with the MIKROE software environment, and some powerful and unique features such as the programming/debugging over WiFi; a feature that will revolutionize the way that the embedded applications are developed.

The CODEGRIP module uses the USB-C connector for a reliable and secure connection with the personal computer (host PC). It does not require any additional drivers because it utilizes an HID driver model, natively supported by the computer's operating system (OS). The USB-C connector is also used to power the development board, simplifying the cable management.


UNI-DS v8 offers **five improved mikroBUS™** sockets, allowing interfacing with a vast amount of electronic circuits and reference designs, standardized under the Click board trademark. Click boards™ are simple to use, require no additional hardware configuration and can be easily connected to the development board by inserting them into any of the available mikroBUS™ sockets. A new design of the mikroBUS™ socket allows even easier interfacing with the Click board™ line of products: it has a sturdier design which helps aligning the Click board™ correctly. To read more about development improvements and huge benefits offered by the mikroBUS™ and Click board™ line of products, visit the official MIKROE web page at www.mikroe.com

UNI-DS v8 development board is equipped with **two display connectors**, located in the middle section of the board. One connector is a single row 16-pin header which supports 2x16 characters Liquid Crystal Display (LCD) in 4-bit mode, offering an optional PWM backlight driving feature. The second display connector is a standardized 2x20-pin female socket, which supports a vast number of display boards, featuring different display modules, such as **TFT Board line of products**. TFT Board displays come in different sizes, they support various resolutions, and they feature different capabilities. All these display boards can be easily mounted to the existing connector offering complete freedom of choice. For more information, please visit the official MIKROE web page at www.mikroe.com

The **I/O (Input/Output) section** occupies the lower part of the development board and contains available MCU pins routed to 2x5-pin headers for easy access. Some of them are equipped with configurable pull-up or pull-down resistors and buttons for applying logic states to MCU pins, while all of them are equipped with LED indicators. Pins are divided into groups following the grouping concept used on the MCU itself. This section is where the most interaction with the MCU takes place.

Communication options such as **USB-UART, USB HOST/DEVICE, CAN** and **Ethernet**, are also included. The CAN connector is hosted on the SiBRAIN [if supported by MCU], the respective USB, USB-UART, and Ethernet connectors are positioned at the edges of the development board, so they can be easily accessed. This is also true for the power connectors, as well as for the external programmer/debugger connector. This allows clean and clutter-free cable management.

UNI-DS v8 development board is supported by a powerful **CODEGRIP Suite**, offering **complete control over the UNI-DS v8 development board**. It is used to intelligently manage programming and debugging tasks, and to configure various other options and settings, providing visual feedback through its clean and comprehensive Graphical User Interface (GUI). To better understand how to operate and configure UNI-DS v8 development board and its integrated CODEGRIP module, a separate manual is provided at www.mikroe.com/manual/codegrip

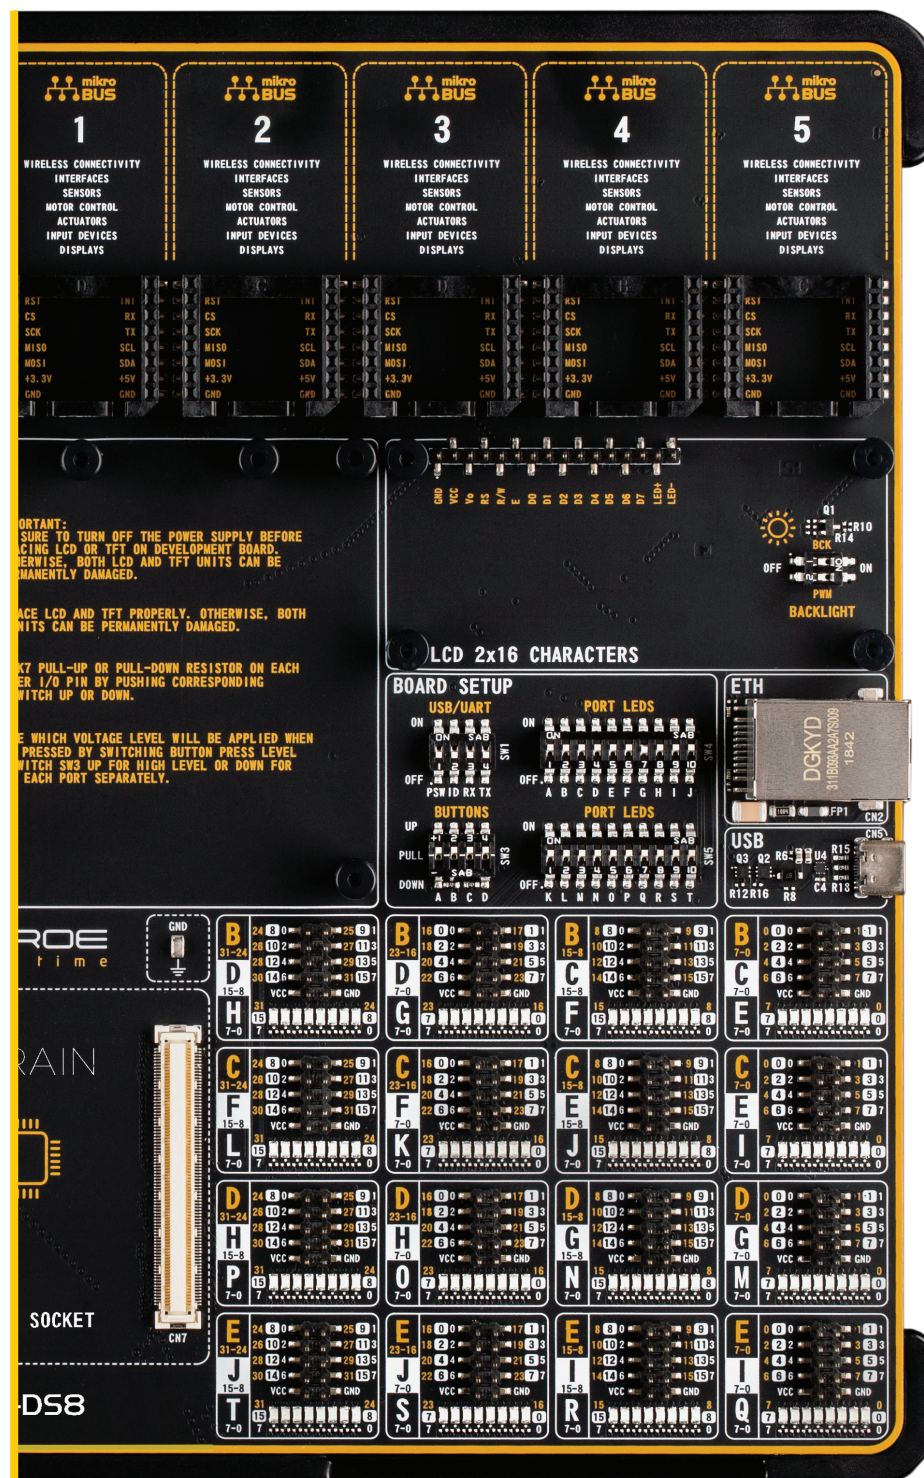

Right under the POWER LED, there is a CHARGE LED, indicating the charging status for the Li-Po or Li-Ion single cell battery, if connected. A complete battery power supply section, including the battery charger circuit, is explained in the respective chapter of this manual.

Below the POWER capacitive button, there is a RESET [6] capacitive button which is not entirely power-related, but it has a similar function: it is routed to the MCU reset pin. Pressing this button will trigger a reset of the host MCU.

Power/debug, USB-C connector

The development board can be powered over the USB-C connector, labeled as POWER/DEBUG [2]. This connector provides power from the USB host, USB power bank, or USB wall adapter. When powered over the USB connector, the available power will depend on the source capabilities.

Maximum power ratings, along with the allowed input voltage range in the case when the USB power supply is used, are given in the table below:

USB Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1.8	6.6
4.4	5.5	5	1.4	7.5
		3.3 & 5	0.8 & 0.8	7.5

Figure 2: USB Power supply table

When using PC as a power source, the maximum power can be obtained if the host PC supports the USB 3.2 interface, and is equipped with USB-C connectors. If the host PC has a USB 2.0 interface, it will be able to provide the least power, since only up to 500 mA [2.5W at 5V] is available from the host in that case.

Note that when using long USB cables or USB cables of low quality, the voltage may drop outside the rated operating voltage range, causing unpredictable behavior of the development board.

NOTE If the host PC is not equipped with the USB-C connector, a Type A to Type C USB adapter may be used.

Power 12VDC, external power supply

An external 12V power supply can be connected over the DC barrel connector, labeled as POWER 12VDC [4]. When using an external power supply, it is possible to obtain an optimal amount of power, since one external power supply unit can be easily switched for another, while its power and operating characteristics can be decided per application. The development board allows maximum current of 3A per power rail, when using an external 12V power supply.

The development board will be able to maintain its operating voltages within the specified limits, as long as the voltage of the external power supply stays within the range stated below, in the table. Having in mind all the additional peripherals that can be connected to the development board, as well as their power consumption, the external power supply should be considered as a primary power source, especially for the most power demanding applications.

Maximum power ratings, along with the allowed input voltage range in the case when the external power supply is used, are given in the table below:

External Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	2.8	9.24
10.6	14	5	2.8	14
		3.3 & 5	2.8 & 2.8	23.24

Figure 3: External Power supply table

When connecting an external power supply over a barrel connector, make sure that the polarity of the barrel connector is matched with its counterpart on the development board, according to the image printed next to the male DC connector.

NOTE

Battery power supply

When powered by a single-cell Li-Po or Li-Ion battery, the development board offers an option to be operated remotely. Combined with the fact that the board

can be remotely programmed and debugged over the WiFi network, the UNI-DS v8 development board allows complete autonomy, allowing it to be used in some very specific situations: hazardous enviroment, agricultural application and etc.

NOTE It is advised to disable the battery charging circuitry if there is no battery connected to the UNI-DS v8 development board. This can be done using CODEGRIP Suite. For more information, please consult the CODEGRIP manual, which can be found on this link: www.mikroe.com/manual/codegrip

The battery connector used on the development board is a 2.5mm pitch XH connector. It allows a range of Li-Po and Li-Ion batteries to be used. The development board offers battery charging functionality from both the USB connector, and the external power supply. The battery charging circuitry of the PSU module manages the battery charging process, allowing the optimal charging conditions and longer battery life. Charging process is indicated by a CHARGER LED indicator.

The battery charging current can be configured by using the CODEGRIP Suite, which offers a choice between 100mA and 500mA when the USB power supply is used, or between 100mA and 200mA, when the external 12V power supply is used. In the case when the UNI-DS v8 development board is powered down, the charging current will be set to 500mA by default [200mA with the external power supply].

If both the external 12V power supply and the USB cable are connected to the development board, the battery will be charged from the external 12V power supply, thus minimizing the USB power consumption.

Maximum power ratings at fully charged battery, along with the allowed input voltage range when the battery power supply is used, are given in the table below:

Battery Power Supply				
Input Voltage [V]		Output Voltage [V]	Max Current [A]	Max Power [W]
MIN	MAX	3.3	1.6	5.28
3.5	4.2	5	1.2	6
		3.3 & 5	0.7 & 0.7	5.81

Figure 4: Battery Power Supply table



Using USB hubs, long USB cables, and low-quality USB cables, may cause a significant USB voltage drop, which can obstruct the battery charging process.

CODEGRIP

programmer / debugger module

Envisioned as the unified development platform, UNI-DS v8 development board is equipped with the onboard CODEGRIP programming/debugging module, which supports various MCUs, produced by several main chip vendors. The CODEGRIP module can be interfaced with the host computer over the USB-C connector.

Besides the USB cable, the CODEGRIP module **[1]** can be accessed over the WiFi network. This is a revolutionary new feature, which allows some unique usage scenarios, currently not available on any other programming/debugging solution in the world. The WiFi connectivity option of the CODEGRIP module offers a complete autonomy of the development board. Running in hazardous environment while debugging the software in real time, programming the MCU with a new software during exposure, having the sensor responses collected and logged remotely from several different base points, debugging a drone firmware while it is in mid-air... These are just a simple examples of what UNI-DS v8 development board can offer.

CODEGRIP module is equipped with LED indicators that provide visual feedback about its status:

POWER (GREEN) indicates that the development board is powered on

USB-LINK (YELLOW) After the host OS completes the USB enumeration of the CODEGRIP module, this LED will indicate that the connection has been established

NET-LINK (AMBER) When the CODEGRIP module is connected to the WiFi network, this LED will indicate that the connection has been established

ACTIVE (RED) Indicates the operational state of the CODEGRIP module: when

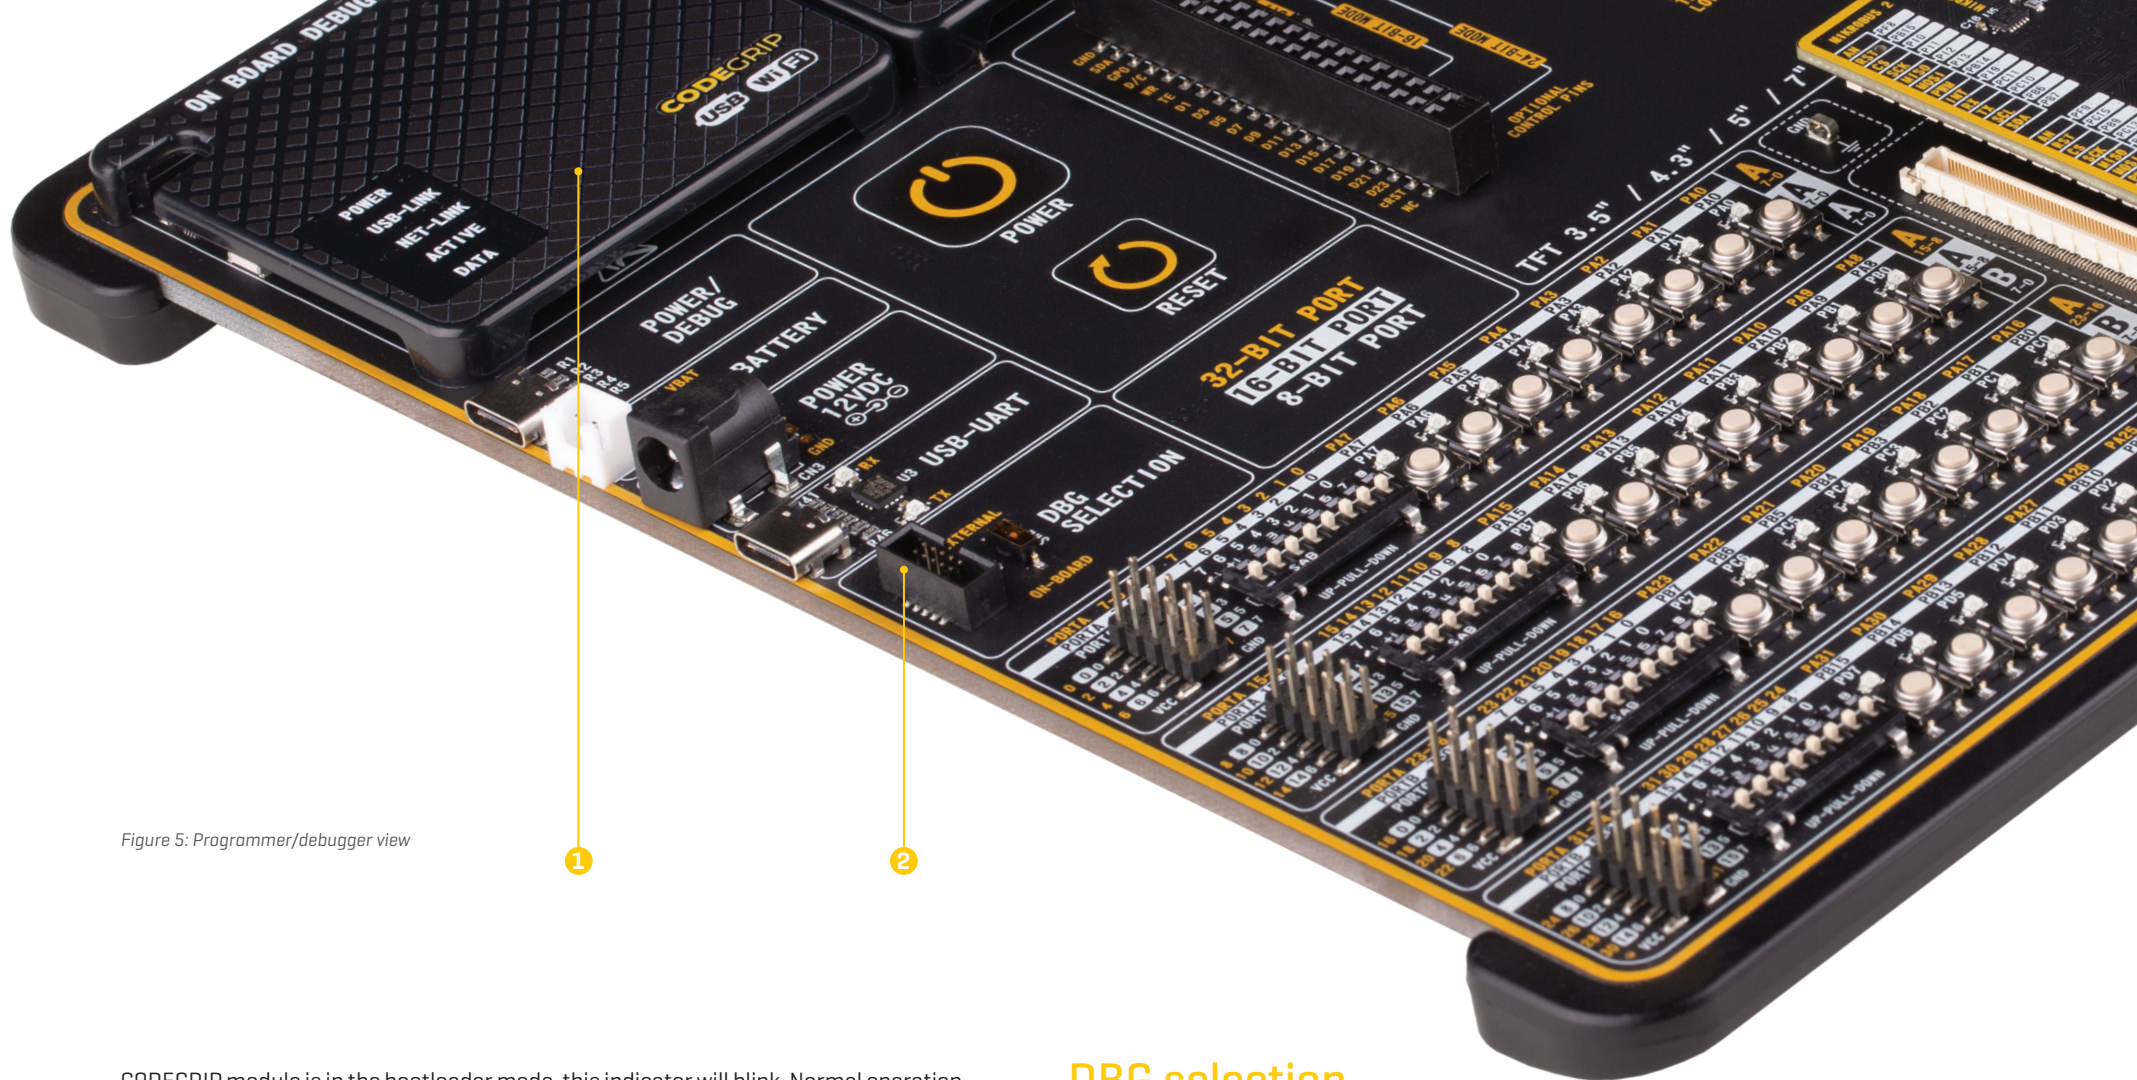


Figure 5: Programmer/debugger view

CODEGRIP module is in the bootloader mode, this indicator will blink. Normal operation of the CODEGRIP module is indicated by the ACTIVE LED being constantly turned ON

DATA [BLUE] Indicates that there is a data transfer ongoing between the MCU and the CODEGRIP module

The onboard CODEGRIP module **[1]** requires no additional drivers, as it utilizes a HID driver model, which is natively supported by the computer OS. This makes its installation very easy and straightforward in the case when the USB cable is used. As soon as the USB cable is connected to the host PC, the CODEGRIP module is enumerated and the development board is ready to be used.

CODEGRIP module is supported by CODEGRIP Suite. Detailed explanation on how to configure and use the CODEGRIP module on the UNI-DS v8 development board, can be found in the CODEGRIP manual, and can be downloaded on the following link: www.mikroe.com/manual/codegrip

DBG selection

The UNI-DS v8 development board is equipped with the standard 2x5-pin connector **[2]** with the 0.05" [1.27mm] pitch, allowing an external programmer/debugger to be connected. The connector supports a wiring pinout compatible with several interfaces, JTAG, SWD, Microchip ICSP. If an external programmer/debugger is connected, the onboard CODEGRIP module should be disabled to avoid data corruption. A DIP switch labeled as SW1, located next to the 2x5 connector, allows the user to select a programmer/debugger that will be used for the MCU programming:

EXTERNAL [up]: an external programmer/debugger is connected, the onboard CODEGRIP module is disabled

ONBOARD [down]: an external programmer is not connected, the onboard CODEGRIP module is enabled

Connectivity

One of the key features of the UNI-DS v8 development board is its connectivity.

It features a diverse amount of connecting options, making the board very versatile, adaptable to any situation, and very easy to work with.

It has two display connectors [1x16 LCD connector and 2x20 display connector], Ethernet, USB-UART, USB HOST/DEVICE, an external programmer/debugger connector and many more. The PORT I/O section is the most distinctive connectivity option, which takes up the entire lower half of the board. It allows direct connection to the available MCU pins. This section also contains LEDs for visual indication of pin states, BUTTONS for applying the desired logic states to the pins, and DIP switches for configuring pull-up or pull-down resistors.

All the LEDs, buttons, and headers are logically organized and grouped as PORTS, following the pin organization topology of the MCU.

The presence of five standardized mikroBUS™ sockets is something that makes the UNI-DS v8 development board very special: the world of Click boards™ is now just under your fingertips. By combining up to 5 different Click boards™, virtually an unlimited number of combinations is possible, considering the fact that the Click board™ repository already has several hundreds of various Click boards™, with more added on a daily basis. Tight integration of the UNI-DS v8 v8 board with the whole MIKROE ecosystem, allows seamless and effortless prototyping, and truly rapid embedded application development. For more info about the mikroBUS™ standard and the Click board™ line of products, please visit the official MIKROE web page at www.mikroe.com





Easily create an IoT Weather Station with the UNI-DS v8 development board.
Use the following tools:

UNI-DS v8 development board

SiBRAIN for STM32 TFT Board 5

G2C click
OLED C click
Temp-Log 2 click
Thunder click
LPS22HB click

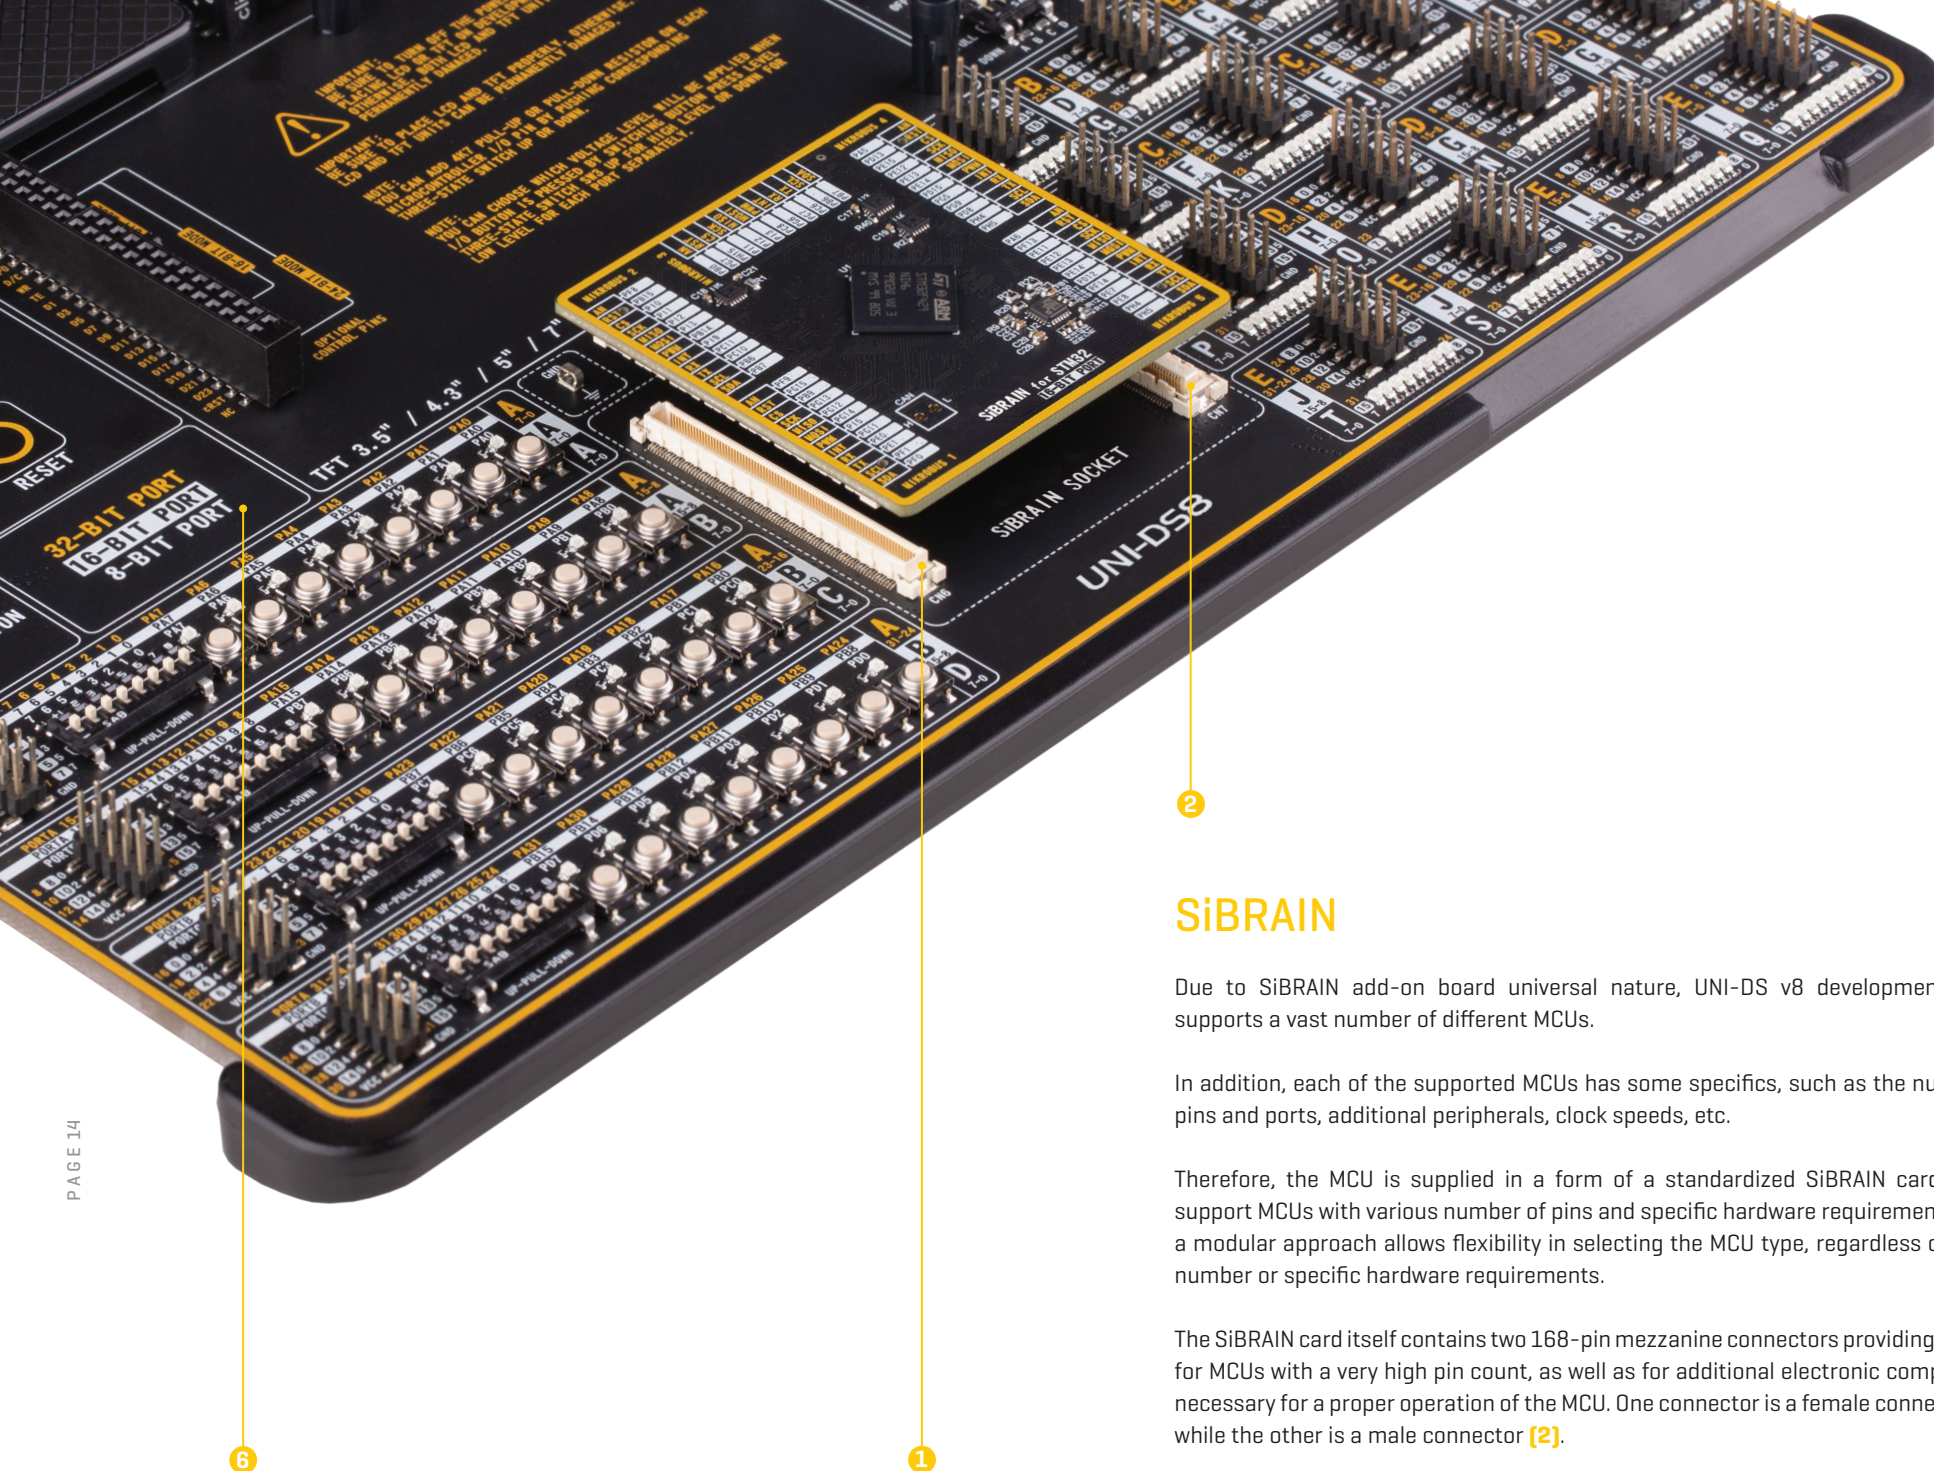


Figure 6: Main board with SiBRAIN socket view

SiBRAIN

Due to SiBRAIN add-on board universal nature, UNI-DS v8 development board supports a vast number of different MCUs.

In addition, each of the supported MCUs has some specifics, such as the number of pins and ports, additional peripherals, clock speeds, etc.

Therefore, the MCU is supplied in a form of a standardized SiBRAIN card. It can support MCUs with various number of pins and specific hardware requirements. Such a modular approach allows flexibility in selecting the MCU type, regardless of its pin number or specific hardware requirements.

The SiBRAIN card itself contains two 168-pin mezzanine connectors providing support for MCUs with a very high pin count, as well as for additional electronic components, necessary for a proper operation of the MCU. One connector is a female connector **[1]**, while the other is a male connector **[2]**.

The development board is likewise, equipped with a pair of complementary connectors, eliminating any possibility of incorrect orientation and placement of the SiBRAIN card. Besides these two connectors, an SiBRAIN card can also include multiplexing circuits, Ethernet PHY ICs, CAN connectors, CAN PHY ICs, crystal oscillators/clock generators,

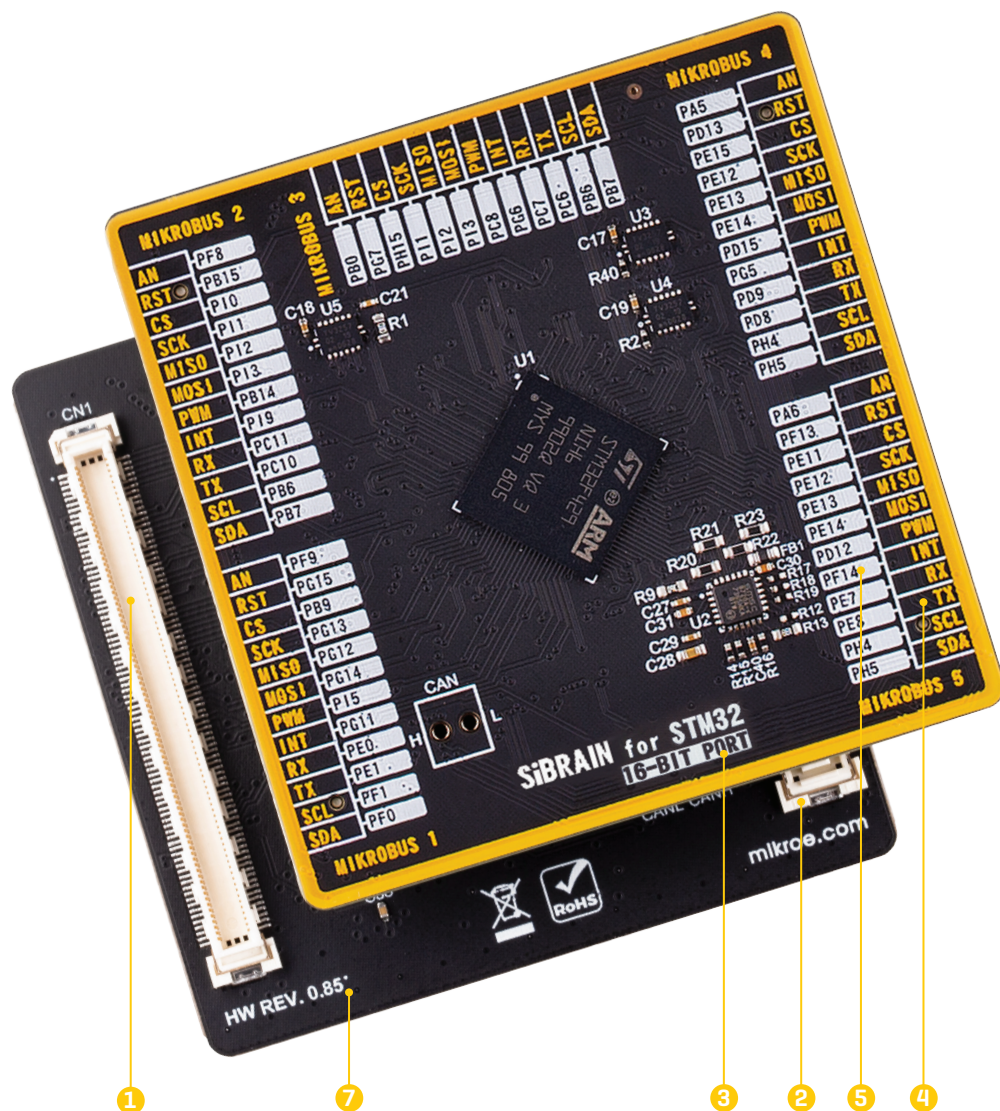


Figure 7: SiBRAIN card back and front view

not having to worry about the pin compatibility and similar issues. Most importantly, it allows very simple swapping between different MCU types during the development phase, without any hardware interventions.

From the top side, each SiBRAIN card has a clearly labeled MCU type it is designed for (SiBRAIN for KINETIS, SiBRAIN for STM32...), as well as its PORT width, printed just below the MCU type label (8-BIT PORT, 16-BIT PORT, 32-BIT PORT) [3].

In addition, pins are grouped in accordance to mikroBUS™ sockets to which they are routed. Therefore, there are 5 groups of pins. The pins labeled with yellow color [4] belong to mikroBUS sockets, while the white labels [5] represent corresponding pins on the MCU.

On the bottom side of the SiBRAIN card, users can find the hardware revision number of the card itself [7].

INPUT / OUTPUT section

In general, I/O pins of any MCU are internally grouped as PORTs. Such pin grouping scheme is kept throughout the development board as well, offering a clean and organized interface.

However, not all SiBRAIN cards have the same PORT width or PORT configuration.

SiBRAIN cards have their ports routed as either 8-bit, 16-bit or 32-bit ports. Therefore, the PORT width is printed out on the SiBRAIN card below the MCU name label [3], as previously described.

To visually distinguish these ports, they are printed using different color-coding schemes [6]. This makes it easy to follow the correct pin labels.

NOTE The picture shown is for illustration purpose only. Actual SiBRAIN card may vary depending on the installed MCU.

voltage filtering capacitors, and some other MCU-specific components, necessary for reliable operation. This makes each SiBRAIN card self-contained unit, allowing the development board to operate on a logic level, not having to facilitate specific requirements of many different MCUs. This also allows the MCU to be freely chosen,

Before you plug the SiBRAIN card into the socket, make sure that the power supply is turned off. Check the SiBRAIN card orientation so it matches the printed outline of the SiBRAIN card on the development board. Place the SiBRAIN card so that both connectors are properly aligned with their onboard counterparts. Then gently press down the SiBRAIN card, if there is a physical resistance, please do not try to force the SiBRAIN card into the socket.



8-BIT port

Pin labels that belong to 8-bit ports are represented by white text on a black background **[1]**. There is a total of twenty 8-bit ports, ranging from PORTA to PORTT. Ports ranging from PORTA to PORTD are routed to the EXPANDED PORTS section **[4]**, while ports ranging from PORTE to PORTT are routed to the COMPACT PORTS **[5]** section.

16-BIT port

Pin labels that belong to 16-bit ports are represented by a black text on a white background **[2]**. There is a total of ten 16-bit ports, labeled from PORTA to PORTJ. Ports ranging from PORTA to PORTB are routed to the EXPANDED PORTS section **[4]**, while ports ranging from PORTC to PORTJ are routed to the COMPACT PORTS section **[5]**.

32-BIT port

Pin labels that belong to 32-bit ports are represented by a yellow text on a black background **[3]**. There is a total of five 32-bit ports, labeled from PORTA to PORTE. PORTA is routed to the EXPANDED PORTS section **[4]**, while ports ranging from PORTB to PORTE are routed to the COMPACT PORTS section **[5]**.

EXPANDED ports

There are four distinctive EXPANDED PORTS, located at the lower left side of the board **[4]**, each containing a set of eight buttons, eight LEDs, a single eight-pole DIP switch, and a single 2x5 pin header with 2.54mm pitch. These EXPANDED PORTS are labeled according to the MCU PORT they are routed to, with respect to the aforementioned color-coded labeling scheme.

COMPACT ports

The lower right side of the board **[5]** is divided into several smaller sections, each with a single 2x5 pin header with 2.54mm pitch, and a group of 8 LEDs. These sections are simplified versions of the EXPANDED PORTS. The COMPACT PORT sections are labeled according to the MCU PORT they are routed to, with respect to the color-coded labeling scheme, discussed above.

PORT buttons

Port buttons can be used to apply the desired logic state to pins of the MCU PORT they are routed to. These buttons are small tactile SPST switches that work in conjunction with a DIP switch, labeled as BUTTONS **[6]** [also labeled as SW3 on the schematic – separately included]. This DIP switch is located in the BOARD SETUP section **[7]**. These buttons apply a logic level to a pin, according to the color labeling scheme as discussed earlier.

BUTTONS DIP switch

This four-position [poles], tri-state DIP switch, allows the button to apply a LOW logic level to an MCU pin when pressed [connecting it to a reference GND], or to apply a HIGH logic level when pressed [connecting it to the power rail]. It can also completely disconnect the button, preventing accidental button presses. To limit the pin current and prevent the excessive inrush of currents when a button is pressed, a protective 220Ω resistor is used, connected in series with the switch. Each position of the BUTTONS DIP switch is used to determine the applied logic level of a button press for the entire PORT, there are only four poles on this DIP switch, allowing control of all four groups of buttons.

UP position: a button applies HIGH logic level to the corresponding PORT pins [according to 8-bit labeling]

MID position: a button is completely disconnected

LOW position: a button applies LOW logic level to the corresponding PORT pins [according to 8-bit labeling]

UP-PULL-DOWN DIP switch

Besides the buttons, each of the four EXPANDED PORTS has a single eight-pole, tristate DIP switch **[8]**, labeled as UP-PULL-DOWN [SW6 through SW9 on the schematic – separately included], used to enable a pull-up or a pull-down resistor for the specific pin, or to leave the specific pin in a floating state:

UP position: connects a 4.7 kΩ resistor between the MCU power rail and the pin associated with the particular DIP switch position [a pin is pulled-up]

MID position: disables both pull-up and pull-down resistor connections from the pin associated with the particular DIP switch position, leaving it in a floating state

DOWN position: connects the 4.7 kΩ resistor between the GND and the pin associated with the particular DIP switch position [a pin is pulled-down]

Figure 8: I/O ports view

The aforementioned color-coded labeling scheme also applies to ordinal numbers above the DIP switch, making it easy to understand which DIP switch position should be used for a specific pin.

PORT LEDs

Each PORT contains a group of eight LEDs [9], used to visually indicate a logic state of the specific pin. These LEDs can be found in both COMPACT PORT and EXPANDED PORT sections. The maximum current through a single LED is limited with the 4.7k resistor. Each LED is connected to a PORT pin and it is labeled according to the pin's name [in the case of the EXPANDED PORTS], or with an ordinal number of that pin [in the case of the COMPACT PORTS], following the aforementioned color-coded labeling scheme.

LEDs on each PORT can be disabled, when they are not needed. Having a LED on a communication line or an A/D converter input might alter expected results, since LED represents an additional electrical load on a particular pin.

There are two DIP switches with ten positions (poles), with each pole assigned to a specific PORT. These DIP switches are labeled as PORT LEDs [11] on the development board [SW4 and SW5 provided separately on the schematic]. A single DIP switch position is used to disable a group of LEDs which belong to a PORT:

ON position (up): enables LEDs for a specific PORT, associated with the particular DIP switch position [according to the 8-bit labeling scheme]

OFF position (down): disables LEDs for a specific PORT, associated with the particular DIP switch position [according to the 8-bit labeling scheme]

2x5 PIN HEADERS

Besides LEDs, there are also 2x5 pin headers [10] in both COMPACT PORT and EXPANDED PORT sections. All the pins which belong to a specific PORT are routed to the 2x5 pin header located in that PORT section, along with the GND and the power rail. Pins on these headers are labeled with ordinal numbers which correspond to the ordinal numbers of the pins within the specific MCU PORT. They are labeled following the color coding scheme.

These 2x5-pin headers can be used to expand the connectivity of the UNI-DS v8 development board, allowing interfacing with other devices, peripherals, and measurement equipment, either by using IDC10 extension cables, IDC10 female sockets, or simply by using jumper wires. Enhanced connectivity is one of the key features of UNI-DS v8 development board, there are many connectivity options provided. However, 2x5-pin headers allow the most extensive connectivity as they expose all the available GPIO MCU pins to the outside world.

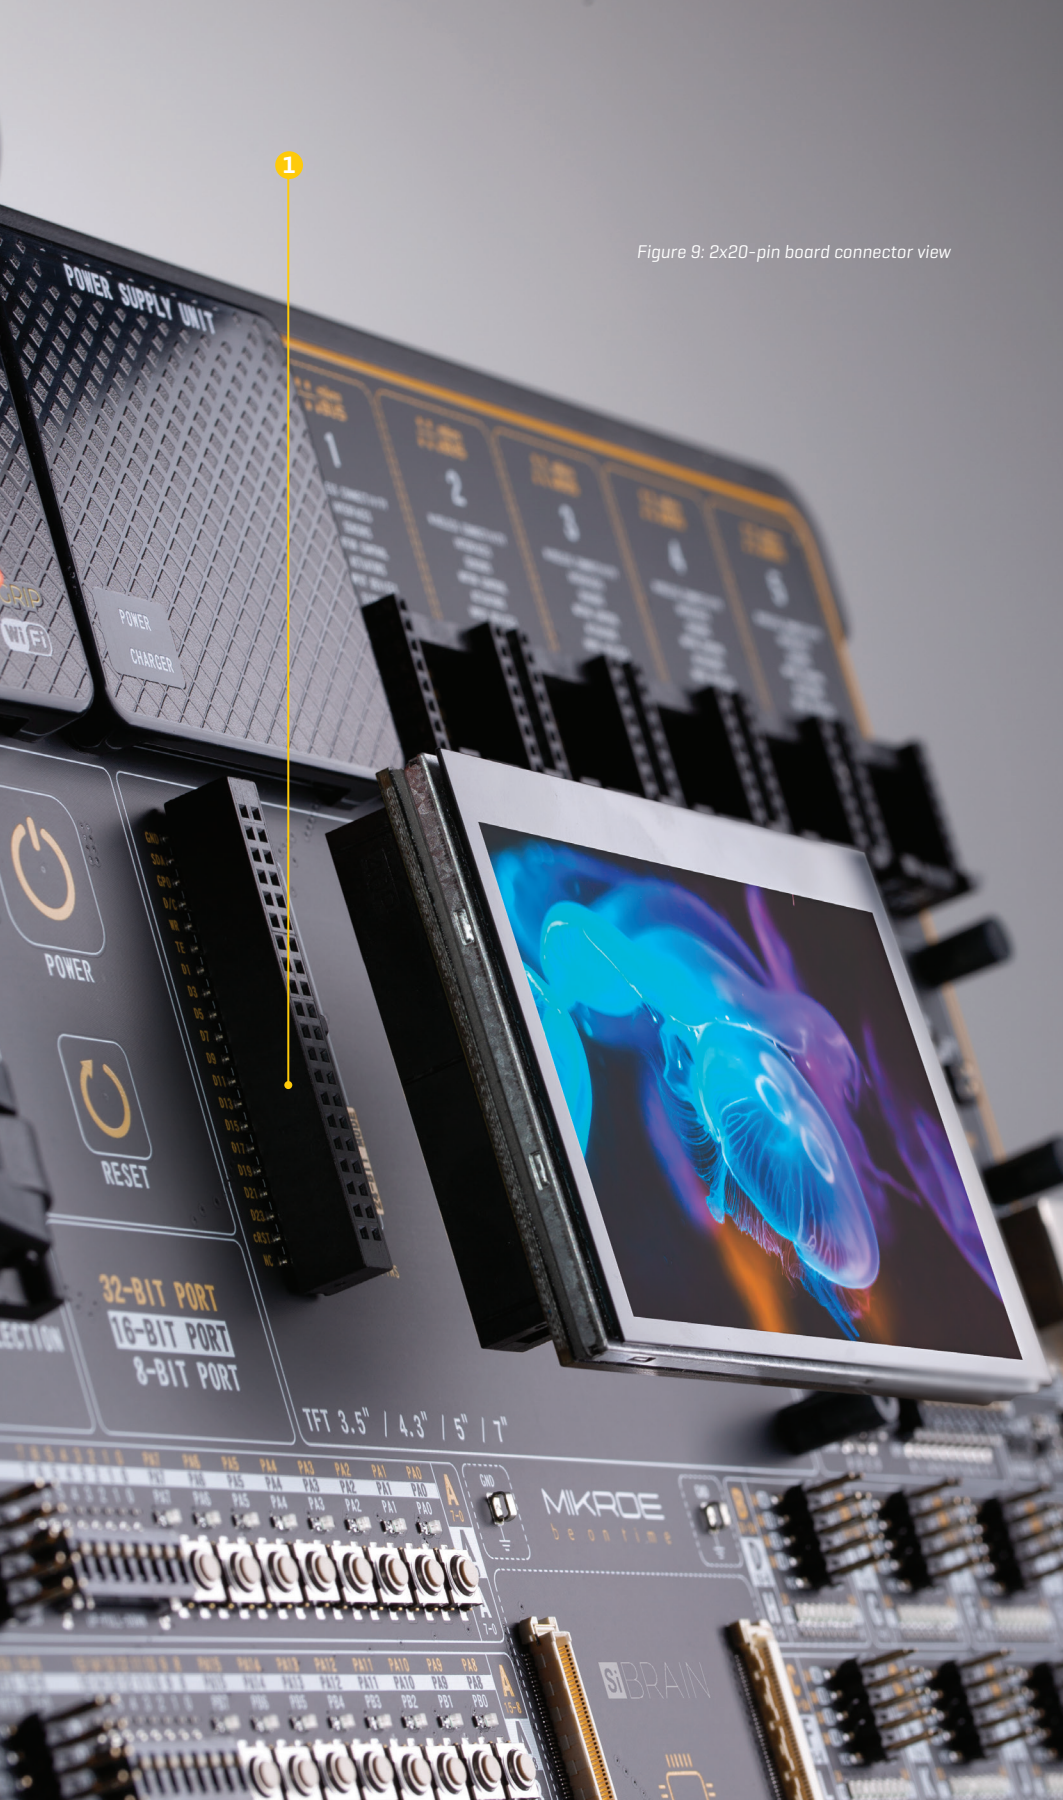


Figure 9: 2x20-pin board connector view

2x20 display connector


UNI-DS v8 development board features a standardized 2x20-pin display connector. This connector consists of the 8080 parallel interface, offering support for displays with up to 8 bits per color (up to 24-bit mode, 16 million colors). Besides the 8080 interface, this connector also contains pins related to touch panel controller,

Make sure to turn off the power supply before placing the display module on the board. Otherwise, the display module or the board can be permanently damaged.



interfaced over dedicated I2C bus lines. The power supply rails are also routed to this connector. Using the standardized pinout ensures compatibility with the existing (i.e. TFT Board Capacitive line of displays), as well as the future versions of display boards. More information can be found at www.mikroe.com/manual/tft-boards

Ground GND	VCC Power supply
Touch Panel I2C Data SDA	SCL Touch panel I2C Clock
Display GPIO GPO	INT Touch panel interrupt
Display command/data D/C	tRST Display reset
Display write WR	CS Display chip select
Display frame sync TE	RD Display read
Data line D1	D0 Data line
Data line D3	D2 Data line
Data line D5	D4 Data line
Data line D7	D6 Data line
Data line D9	D8 Data line
Data line D11	D10 Data line
Data line D13	D12 Data line
Data line D15	D14 Data line
Data line D17	D16 Data line
Data line D19	D18 Data line
Data line D21	D20 Data line
Data line D23	D22 Data line
Touch panel reset cRST	STB Display stand-by
Not connected NC	WK Touch panel wake-up

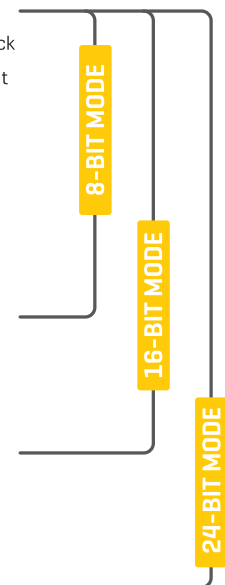

1x16 display connector

Liquid Crystal Display [LCD] is a cheap and popular way of representing application results, messages, or some other type of information to users. UNI-DS v8 natively supports 2x16 characters LCD module, connected in 4-bit mode. It offers a dedicated 1x16-pin header [2] that can host a compatible LCD. Each pin of the connector is labeled on the development board and should be connected with the respective pin of the LCD:


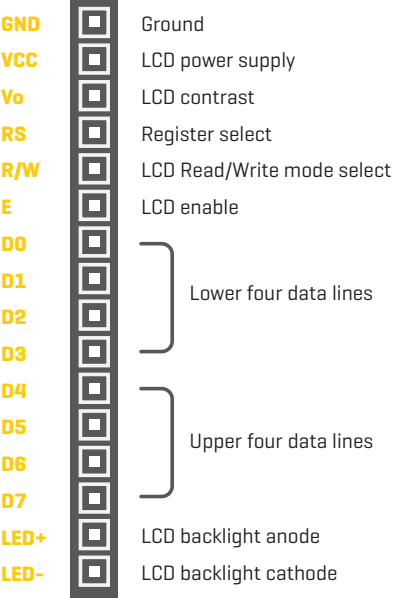


Figure 10: 1x16 display header view

To configure optional backlight settings of the LCD, a two-pole DIP switch can be used, labeled as BACKLIGHT, located in the LCD 2x16 CHARACTERS section of the board:

- SW11.1 ON (up):** LCD backlight is ON;
OFF (down): LCD backlight is OFF
- SW11.2 ON (up):** PWM signal from the MCU controls the LCD backlight brightness;
OFF (down): the brightness amount is fixed and can't be controlled by the MCU

NOTE There are four plastic spacers used to provide physical support for both types of connected displays, ensuring a reliable connection and preventing bending of their pins.

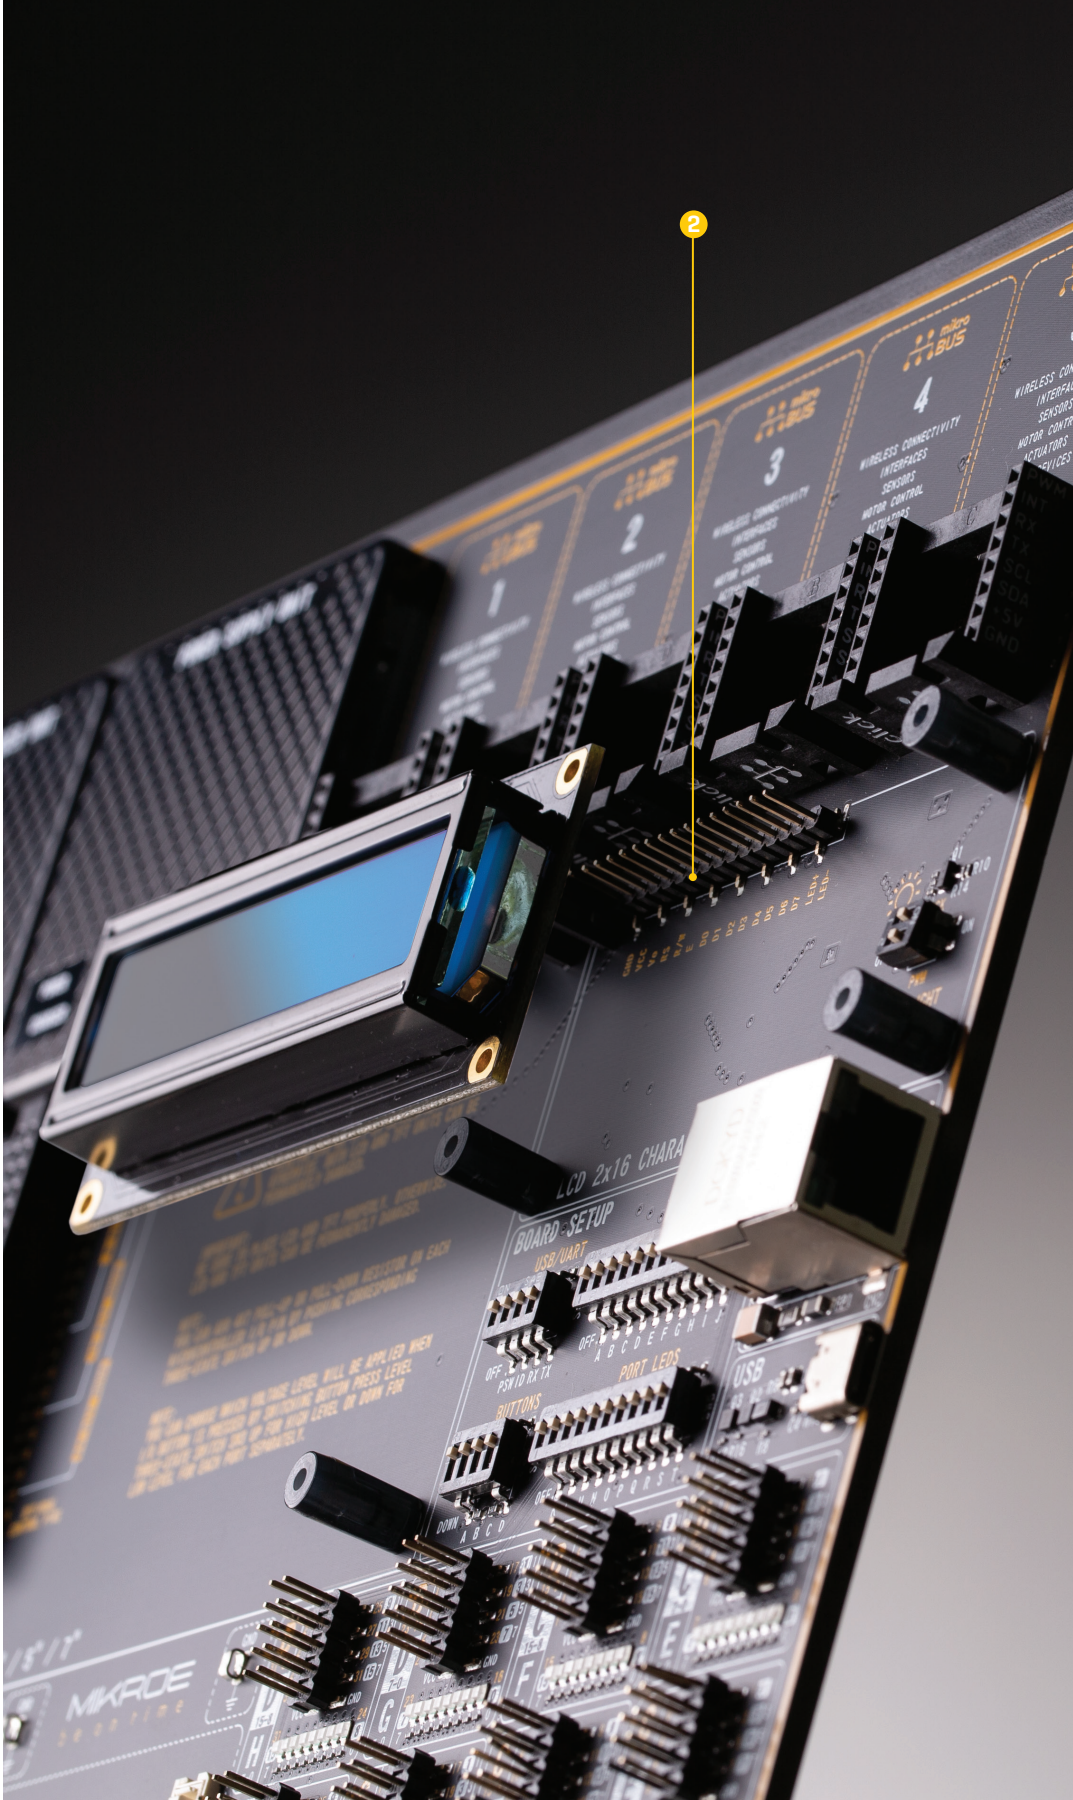

mikroBUS™ sockets

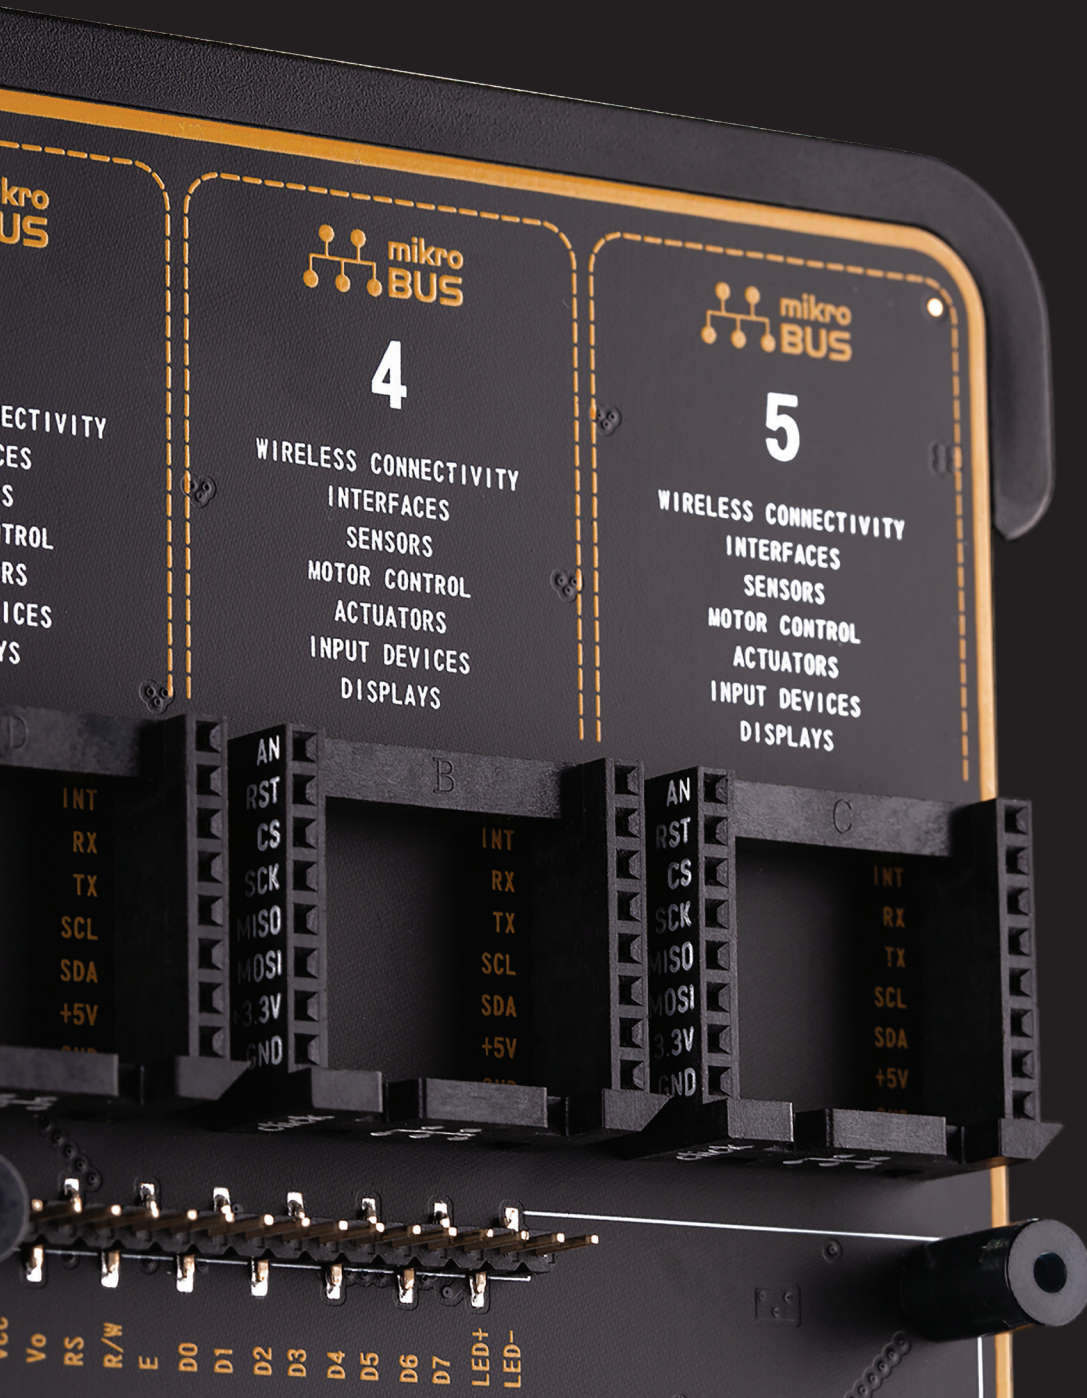


Figure 11: Main board with mikroBUS™ socket close up view

The superior connectivity features of the UNI-DS v8 development board are rounded up with five standardized mikroBUS™ host connectors. It is a considerable upgrade for the board, as it allows interfacing with the vast amount of Click boards™.

mikroBUS™ is the add-on board standard that offers maximum expandability with the smallest number of pins. More information at www.mikroe.com/mikrobus

All the mikroBUS™ sockets are now redesigned and improved. They became much sturdier, allowing a better grip of the Click board™. In addition to added horizontal supports between two 8-pin connectors, the right lower edge is chamfered at the angle of 45°, the same as the Click board™, making it seamlessly fit into the mikroBUS™ socket. The new mikroBUS™ socket is now a fully-fledged, standardized monolithic component with all its pins clearly labeled, offering very good grip for the Click board™, preventing it to flip over or to be placed incorrectly.

The mikroBUS™ socket supports the following communication interfaces: SPI, UART, and I2C. There are also single pins reserved for PWM, Interrupt, Analog input, Reset, and SPI Chip Select. The mikroBUS™ socket also contains pins with the two power rails (3.3V and 5V), along with the GND pins.

Each SiBRAIN card has different pins routed to the mikroBUS™ sockets, depending on the particular MCU. Therefore, each mikroBUS™ socket is labeled on the development board with its ordinal number, by which the connector is referenced to in the MIKROE development environment, software applications, tutorials, etc.

Also, each SiBRAIN card has the pins routed to the corresponding mikroBUS™ clearly labeled on the SiBRAIN card itself, as described in the SiBRAIN CARDS section. This allows users to instantly know which MCU pin is routed to a pin on the specific mikroBUS™ socket.

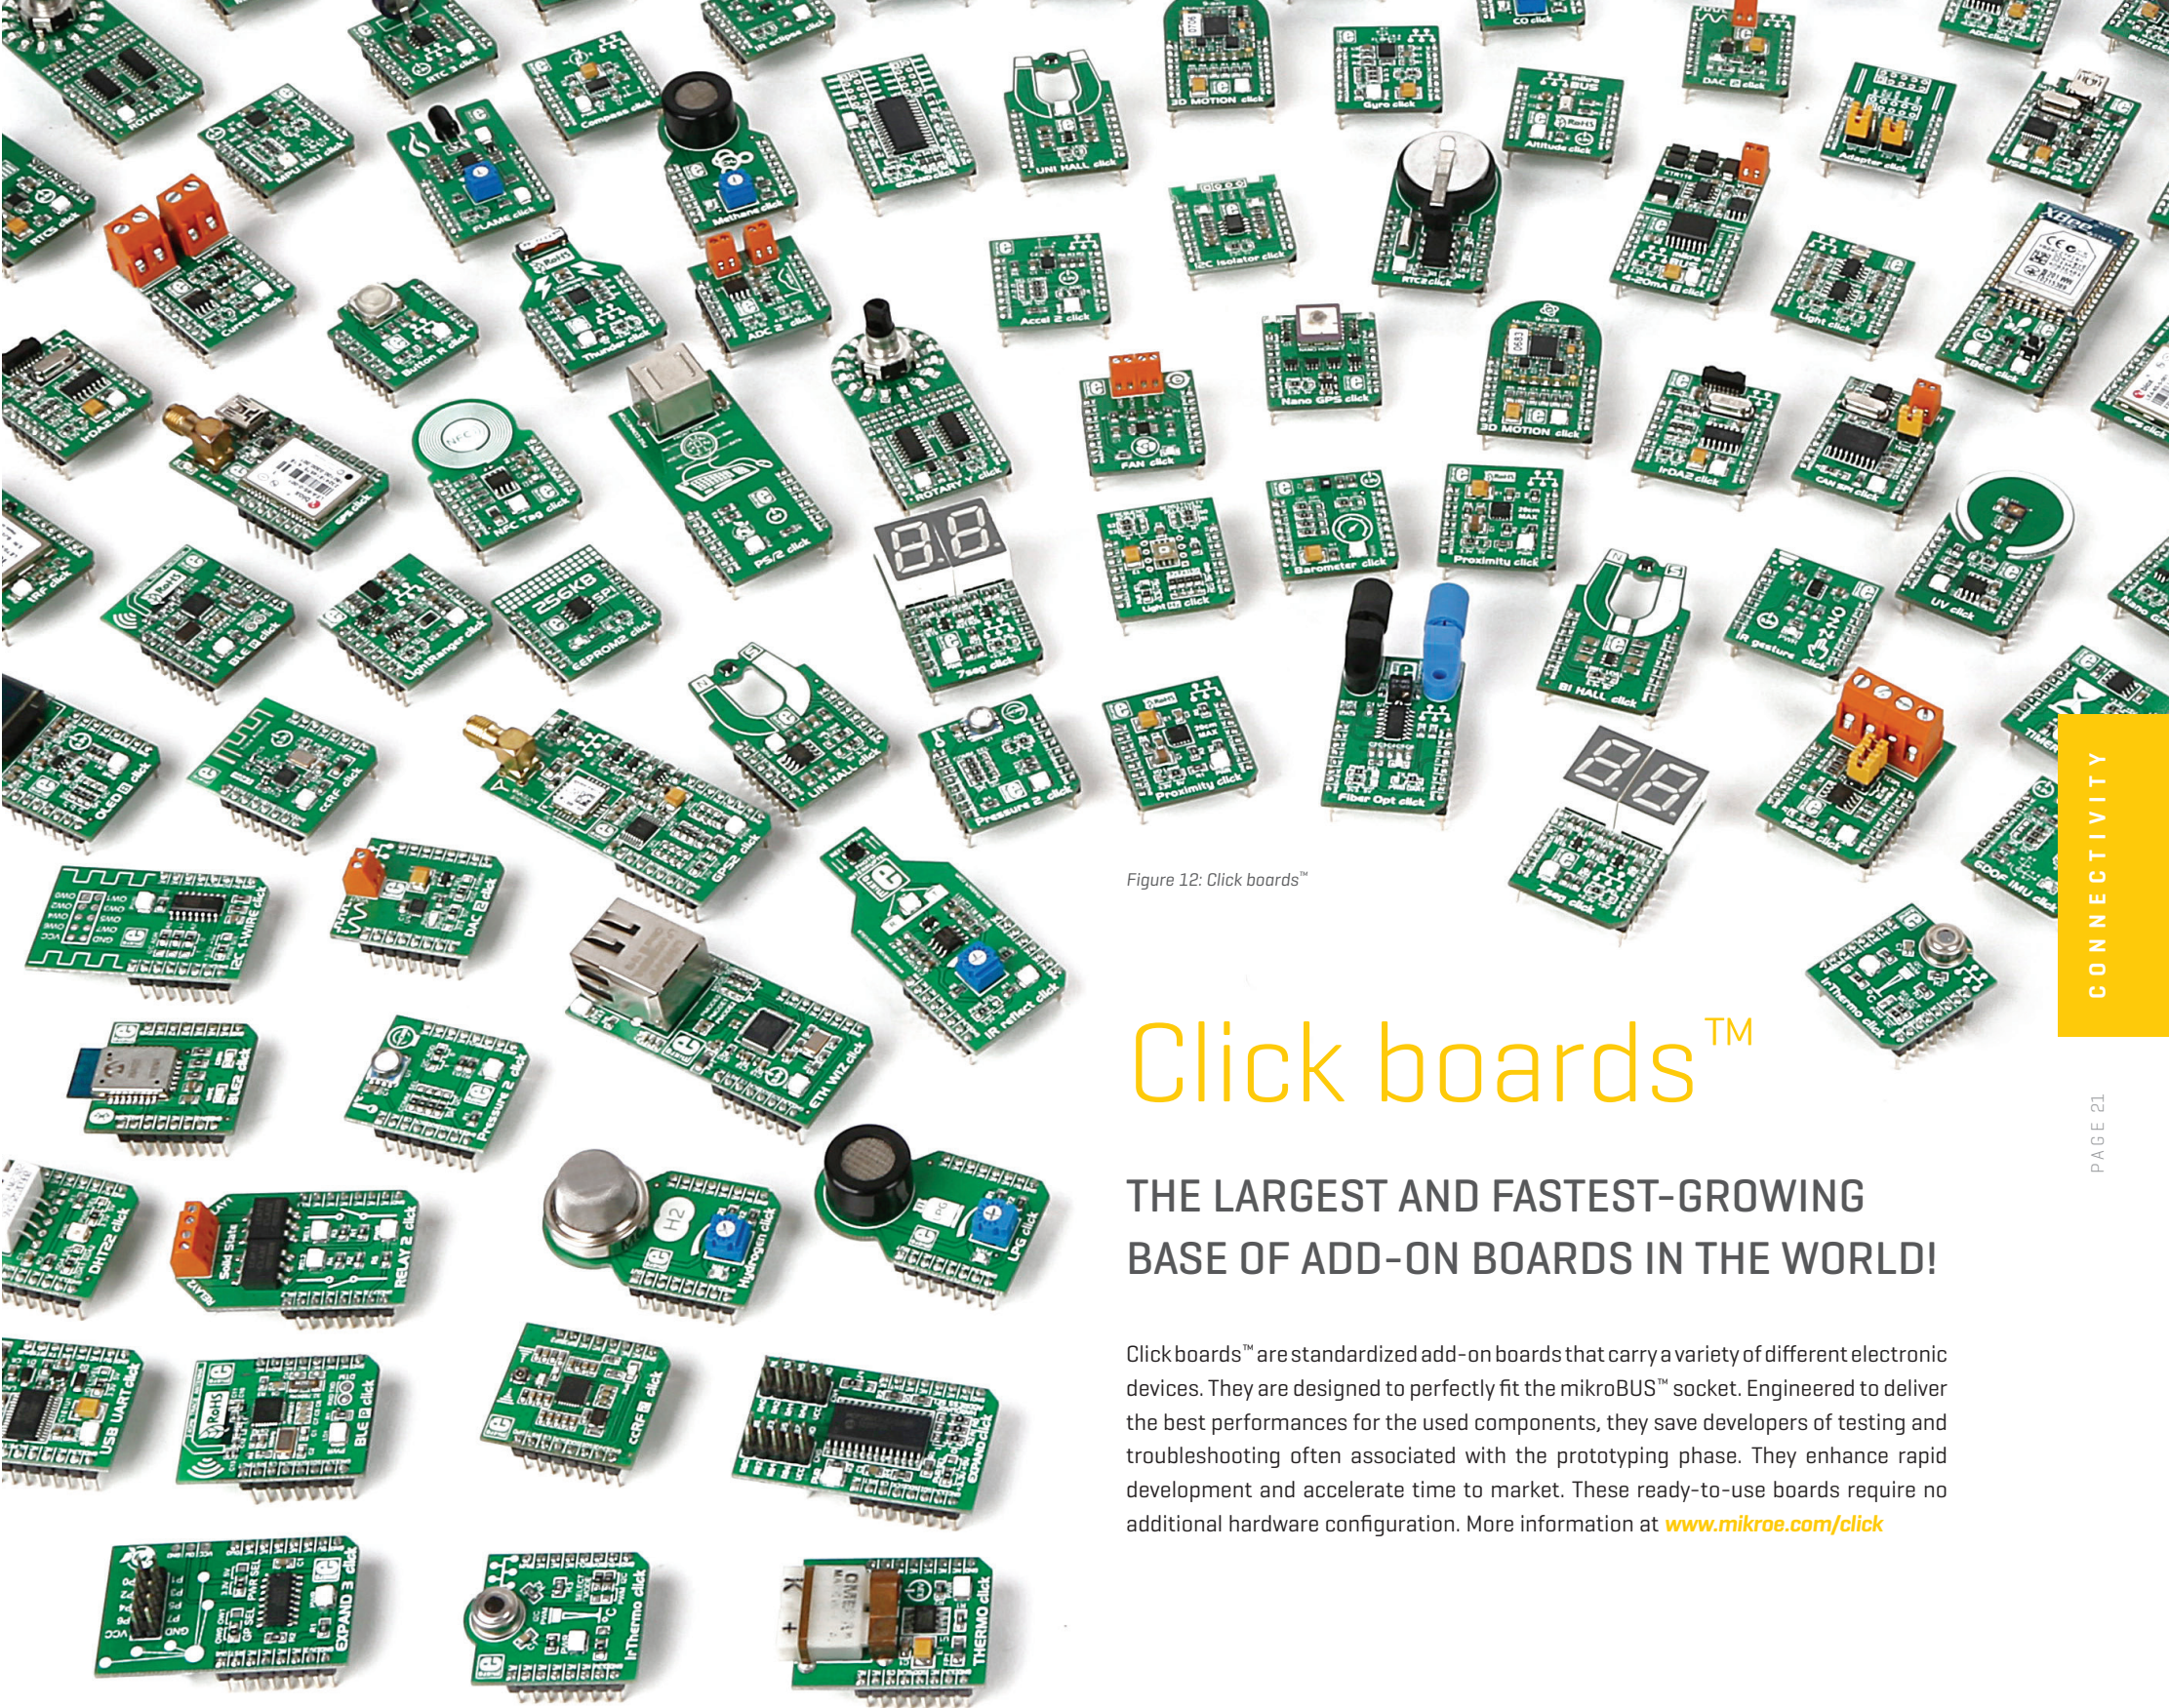


Figure 12: Click boards™

Click boards™

THE LARGEST AND FASTEST-GROWING
BASE OF ADD-ON BOARDS IN THE WORLD!

Click boards™ are standardized add-on boards that carry a variety of different electronic devices. They are designed to perfectly fit the mikroBUS™ socket. Engineered to deliver the best performances for the used components, they save developers of testing and troubleshooting often associated with the prototyping phase. They enhance rapid development and accelerate time to market. These ready-to-use boards require no additional hardware configuration. More information at www.mikroe.com/click

Communication

Communication connectors allow the development board to be connected with many different devices that use high-layer communication protocols such as Ethernet, USB, etc. Also, there is a USB-UART converter, offering simplified communication with the personal computer over the emulated serial interface. Each of these connectors will be described in more details, in the following sections of the manual.

USB-UART

UART [Universal Asynchronous Receiver/Transmitter] interface is one of the most common interfaces for data exchange between the MCU and other external devices. UNI-DS v8 development board offers the UART connectivity over the USB-C connector **[1]** by utilizing the FT230XQ, a popular USB-UART bridge IC, produced by FTDI Chip. This IC contains the complete USB stack necessary for the interface bridging between the UART peripheral of the MCU and the USB interface of the PC. FT230XQ drivers are available for download from the UNI-DS v8 product web page, as well as from the official FTDI drivers download web page.

To enable data exchange via the USB-UART connector, the MCU UART peripheral lines must be connected to the corresponding pins of the FT230XQ IC. This can be done using the four-pole DIP switch, labeled as USB/UART [SW1 on the schematic]. Only two switch positions are used for the UART setup, while the other two switch positions are reserved for USB HOST/DEVICE functions:

- SW1.3** **ON (up):** connects the UART RX pin from the MCU to the FT230XQ IC;
 OFF (down): disconnects the UART RX pin from the FT230XQ IC
- SW1.4** **ON (up):** connects the UART TX pin from the MCU to the FT230XQ IC;
 OFF (down): disconnects the UART TX pin from the FT230XQ IC

USB

USB [Universal Serial Bus] **[2]** is a very popular industry standard that defines cables, connectors, and protocols used for communication and power supply between devices. USB-C [USB Type-C connector] is the latest version of the USB connector, developed by the USB Implementation Forum [USB-IF]. Due to its many advantages including symmetrical pinout, higher current capacity, and faster supported data rates, it is probably going to replace all the previous USB connector types. USB-C connector supports both USB HOST and USB DEVICE modes. This enables MCUs equipped with the USB peripheral to act either as a USB HOST or as a USB DEVICE, allowing development of a range of various USB based applications.

The USB mode selection is done using an a specialized controller IC solution. This IC provides Configuration Channel [CC] control logic detection and indication functions. The HOST/DEVICE detection pin [USB ID], as well as the HOST/DEVICE configuration pin [USB PSW] of the MCU, can be connected with the logic control circuit by using the DIP switch [SW1], located in the BOARD SETUP section:

- SW1.1** **ON (up):** connects the HOST/DEVICE configuration pin of the MCU with the PTN5150 logic control circuit;
 OFF (down): disconnects the HOST/DEVICE configuration pin from the PTN5150 logic control circuit
- SW1.2** **ON (up):** connects the HOST/DEVICE detection pin of the MCU with the logic control circuit;
 OFF (down): disconnects the HOST/DEVICE detection pin from the logic control circuit

To set up UNI-DS v8 development board as the USB HOST, the PSW pin should be set to a LOW logic level [0] by the MCU. If set to a HIGH logic level [1] the development board acts as a DEVICE. In HOST mode, UNI-DS v8 development board provides the power over the USB-C connector for the attached device.

The USB ID pin is used to detect the type of the device attached to the USB port, according to USB OTG specifications: the USB ID pin connected to GND indicates a HOST, while the USB ID pin set to a high impedance state [HI-Z] indicates that the connected peripheral is a DEVICE.

Ethernet

Ethernet is a popular networking technology for local area networks (LAN). Systems communicating over Ethernet divide a stream of data into individual packets, known as frames. Each frame contains source and destination addresses and error-checking data so that damaged data can be detected and re-transmitted. This makes the Ethernet protocol very popular for communication over longer distances or in noisy environments.


UNI-DS v8 features standard RJ-45 Ethernet connector [3] which enables MCUs that support Ethernet communication to establish a connection with a personal computer, network router, or other Ethernet network device. All four Ethernet lines (TX P, TX N, RX P, and RX N), as well as the LED indicator lines (LED1, LED2+, LED2-) are routed directly to the SiBRAIN socket and cannot be accessed via PORT headers.

Additional GNDs

UNI-DS v8 development board contains two exposed GND pins just above the SiBRAIN card, which can be used to connect measurement or testing equipment. These additional GND pins allow secure connection with the instrumentation probes, avoiding loose cables or unreliable contacts that might compromise the accuracy of the readings.

Figure 13: UNI-DS v8 development board





What makes you want to be an embedded developer? Is it the recognition of your skills, invention, or the development process? Whatever the reason is, we want to let you know that we are here for you every step of the way.

You can enjoy the process focused, yet relaxed – everything else is taken care of.

Enjoy premium.



What's Next?

You have now completed the journey through each and every feature of the UNI-DS v8 development board. You have become familiar with its modules, organization, and the programmer/debugger. Now you are ready to start using your new board. We suggest following steps which are highly recommended to begin with.

1 COMPILERS

Easy programming, clean interface, powerful debugging, great support - our compilers come in three different flavors: mikroC PRO, mikroBASIC PRO and mikroPASCAL PRO, offering a complete rapid embedded development solution for these 3 major programming languages. www.mikroe.com/compilers

Fast, professional, multiplatform, and multi-architectural NECTO Studio is already in the air. For more information, please visit: www.mikroe.com/necto

2 PROJECTS

Once you have chosen your compiler, and since you already got the board, you are ready to start writing your first projects. We have equipped our compilers with dozens of examples that demonstrate the use of each and every feature of the UNI-DS v8 development board. This makes an excellent starting point for future custom projects. Just load the example, read well commented code, and see how it works on hardware.

3 COMMUNITY

We invite you to join thousands of users of MIKROE development tools. You will find useful projects and tutorials and get help from a large user community. If you want to download free projects and libraries, or share your own code, please visit the Libstock website. With user profiles, you can get to know other programmers, and subscribe to receive notifications on their code. www.libstock.mikroe.com

4 SUPPORT

MIKROE offers free Tech Support to the end of its life span, so if anything goes wrong, we are ready and willing to help. We know how important it is to be able to rely on someone in the moments when we are stuck with our projects for any reason, or facing a deadline. This is why our Support Department, as one of the pillars upon which our company is based, now also offers the Premium Technical Support to business users, ensuring even shorter time-frame for solutions. The WiFi debugger feature offers additional level of technical support, allowing our team to provide help by directly connecting to the end users hardware. www.helpdesk.mikroe.com

DISCLAIMER

All the products owned by MikroElektronika are protected by copyright law and international copyright treaty. Therefore, this manual is to be treated as any other copyright material. No part of this manual, including product and software described herein, must be reproduced, stored in a retrieval board, translated or transmitted in any form or by any means, without the prior written permission of MikroElektronika. The manual PDF edition can be printed for private or local use, but not for distribution. Any modification of this manual is prohibited.

MikroElektronika provides this manual 'as is' without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties or conditions of merchantability or fitness for a particular purpose.

MikroElektronika shall assume no responsibility or liability for any errors, omissions and inaccuracies that may appear in this manual. In no event shall MikroElektronika, its directors, officers, employees or distributors be liable for any indirect, specific, incidental or consequential damages [including damages for loss of business profits and business information, business interruption or any other pecuniary loss] arising out of the use of this manual or product, even if MikroElektronika has been advised of the possibility of such damages. MikroElektronika reserves the right to change information contained in this manual at any time without prior notice, if necessary.

HIGH RISK ACTIVITIES

The products of MikroElektronika are not fault – tolerant nor designed, manufactured or intended for use or resale as on – line control equipment in hazardous environments requiring fail – safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication boards, air traffic control, direct life support machines or weapons systems in which the failure of Software could lead directly to death, personal injury or severe physical or environmental damage ['High Risk Activities']. MikroElektronika and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

TRADEMARKS

The MikroElektronika name and logo, the MikroElektronika logo, mikroC, mikroBasic, mikroPascal, mikroProg, mikromedia, Fusion, Click boards™ and mikroBUS™ are trademarks of MikroElektronika. All other trademarks mentioned herein are property of their respective companies.

All other product and corporate names appearing in this manual may or may not be registered trademarks or copyrights of their respective companies, and are only used for identification or explanation and to the owners' benefit, with no intent to infringe.

Copyright © MikroElektronika, 2022. All Rights Reserved.



If you want to learn more about our products, please visit our website at www.mikroe.com

If you are experiencing some problems with any of our products or just need additional information, please place your ticket at www.mikroe.com/support

If you have any questions, comments or business proposals,
do not hesitate to contact us at office@mikroe.com